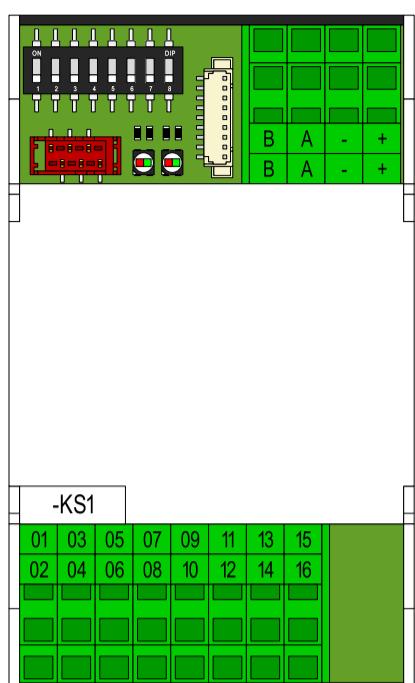


Image**Commercial data**

Product code	20801940
Product description	Smartswitch 47-9225b[00]_0 NoNa+ input module 3
Packing unit	1
Weight	0.099 [kg]
Custom tariff number	8537.10.91
Country of origin	NL (Netherlands)

Dimensions

Width	53.60 [mm]
Height	89.60 [mm]
Depth	81.00 [mm]

Standards and regulations

EMC	Conformance with EMC directive 2014/30/EU
RoHS	Conformance with RoHS directive 2011/65/EU
WEEE	Conformance with WEEE directive 2002/96/EC

Connection data

+	DC24V[+]	Voeding DC24V[+]
+	DC24V[+]	Voeding DC24V[+]
-	DC24V[-]	Voeding DC24V[-]
-	DC24V[-]	Voeding DC24V[-]
A	RS485[A]	Communicatie bus RS485[A]
A	RS485[A]	Communicatie bus RS485[A]
B	RS485[B]	Communicatie bus RS485[B]
B	RS485[B]	Communicatie bus RS485[B]

01	IN_U1	Level switch drain tank 2 empty
02	GND	GND measurements [IN_D1],[IN_D2]
03	IN_U2	Level switch drain tank 3 empty
04	GND	GND measurements [IN_D3],[IN_D4]
05	IN_U3	Level switch drain tank 4 empty
06	GND	GND measurements [IN_D5],[IN_D6]
07	IN_U4	Level switch drain tank 5 empty
08	GND	GND measurements [IN_D7],[IN_D8]
09	IN_U5	Level switch drain tank 6 empty
10	IN_P1	Not available
11	IN_U6	Level switch drain tank 7 empty
12	GND	GND measurements [IN_P1]
13	IN_U7	Level switch drain tank 8 empty
14	IN_P2	Not available
15	IN_U8	Not available
16	GND	GND measurements [IN_P2]

Connection data, details

+	DC24V[+]	Terminal power supply DC24V of Smartswitch, polarity [PLUS]. The free [PLUS][+] terminal can be used to supply power to a conterminous Smartswitch.
-	DC24V[-]	Terminal power supply DC24V of Smartswitch, polarity [MIN]. The free [MIN][-] terminal can be used to supply power to a conterminous Smartswitch.
A	RS485[A]	Terminal RS485 communication bus, signal line [A].
B	RS485[B]	Terminal RS485 communication bus, signal line [B].

01	IN_U1	Digital input for dry contact [NC], that when opened will cause a detection drain tank 2 empty in the control. When not used interconnect [01] and [02].
03	IN_U2	Digital input for dry contact [NC], that when opened will cause a detection drain tank 3 empty in the control. When not used interconnect [03] and [02].
05	IN_U3	Digital input for dry contact [NC], that when opened will cause a detection drain tank 4 empty in the control. When not used interconnect [05] and [04].
07	IN_U4	Digital input for dry contact [NC], that when opened will cause a detection drain tank 5 empty in the control. When not used interconnect [07] and [04].
09	IN_U5	Digital input for dry contact [NC], that when opened will cause a detection drain tank 6 empty in the control. When not used interconnect [09] and [06].
11	IN_U6	Digital input for dry contact [NC], that when opened will cause a detection drain tank 7 empty in the control. When not used interconnect [11] and [06].
13	IN_U7	Digital input for dry contact [NC], that when opened will cause a detection drain tank 8 empty in the control. When not used interconnect [13] and [08].

Ambient conditions

Degree of protection	IP20	
Ambient temperature (operation)	-10...50 [°C]	14...122 [°F]
Ambient temperature (storage/transport)	-20...50 [°C]	-4...122 [°F]
Permissible humidity (operation)	20...85 [%]	
Permissible humidity (storage/transport)	20...85 [%]	

Terminal data

Conductor cross section solid min.	0.2 [mm²]
Conductor cross section solid max.	2.5 [mm²]
Conductor cross section flexible min.	0.2 [mm²]
Conductor cross section flexible max.	2.5 [mm²]
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14

General

Mounting type	DIN rail mounting according to EN60715
---------------	--

Supply voltage

Power supply	DC24V
Current consumption typically	≤ 50 [mA], at DC24V, at 25 [°C]

Data interface

Interface 1	RS485
Connection method	Spring-cage connection
Transmission medium	2-wire Twisted-Pair + signal ground
Transmission length max.	1200 [m]
Transmission speed	115.2 [kBit/s]

Notification

Location	LED status	Status Smartswitch control
PCB[1]	Green continuously	Smartswitch connection with touchscreen controller is active. Smartswitch control is inactive.
	Green blinking	Smartswitch connection with touchscreen controller is active. Smartswitch control is active. Smartswitch control alarm status is inactive.
	Red continuously	Smartswitch connection with touchscreen controller is inactive. Smartswitch control is inactive.
	Red blinking	Smartswitch connection with touchscreen controller is active. Smartswitch control is active. Smartswitch control alarm status is active.

Location	LED status	Status bus communication
PCB[2]	Green blinking	Smartswitch is receiving data over the bus [Rx].
	Red blinking	Smartswitch is transmitting data over the bus [Tx].

Remarks

1 Transmission length max.

The transmission length max. (i.e. Maximum length of the RS485 BUS-cable in the installation) of 1200 [m], only applies when a suitable RS485 Bus-cable type is utilized in the installation.

General specification for RS485 BUS-cable:


- Suitable for bus systems based on RS485,
- Twisted pair(s),
- Shielded,
- Characteristic impedance 120 [Ohm].

Recommended cable types:

- 32002810 Buskabel UNITRONIC BUS LD 2x2x0.22 100 [m]
- 32002811 Buskabel UNITRONIC BUS LD 2x2x0.22 300 [m]
- 32002812 Buskabel UNITRONIC BUS LD 2x2x0.22 500 [m]

32002820 Buskabel UNITRONIC BUS LD 3x2x0.22 100 [m]

Schematisch

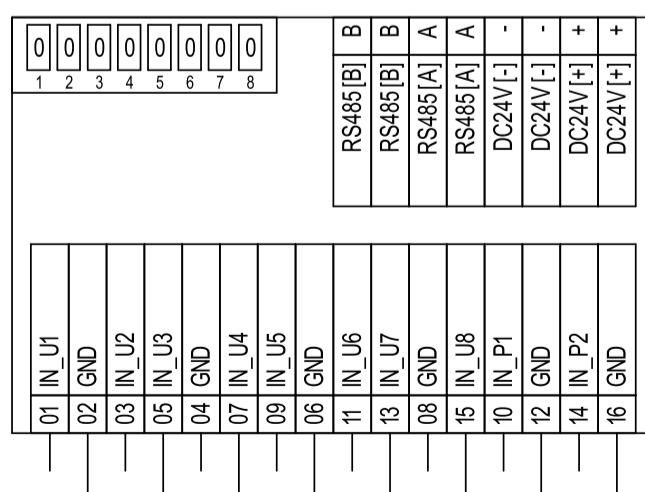

Project file: 20801940DSH030 Smartswitch 47-9225b[00]_0 NoNa+ input module 3

Project number:

Project initial date: 01/04/2023

URL: http://www.Ridder.com

Document number: 20801940DSH030

Project designed by: MBL

Page initial date: 01/04/2023 Page: 2

Page designed by: MBL of: 2

Page revision date:

Page index:

Page revision: